

## Monitor and control a S7-400-PCU with Braumat-OS without Braumat-Software in the PCU

You can integrate a S7-400 to Braumat without the need to have any Braumat-Software in the PLC. You can visualize all values in the Graphics and change them.

Integrate a new S7-416 with the Function Administration, Configuration.

Uncheck Recipe-control

Then open the file \windcs\sys\area.ini and write "Sistar=0 "to the corresponding PCU [PCUx]

Name=remote\_PCU

EnableRecipeControl=0

Family=S7

IP\_Addr=192.168.0.2

I2\_addr=2


SW\_Recipe=V5

Sistar=0

## Run Braumat with S7-300

You can integrate a S7-300 to Braumat without the need to have any Braumat-Software in the PLC. You can visualize all values in the Graphics and change them.

Integrate a new S7-416 with the Function Administration, Configuration like this:

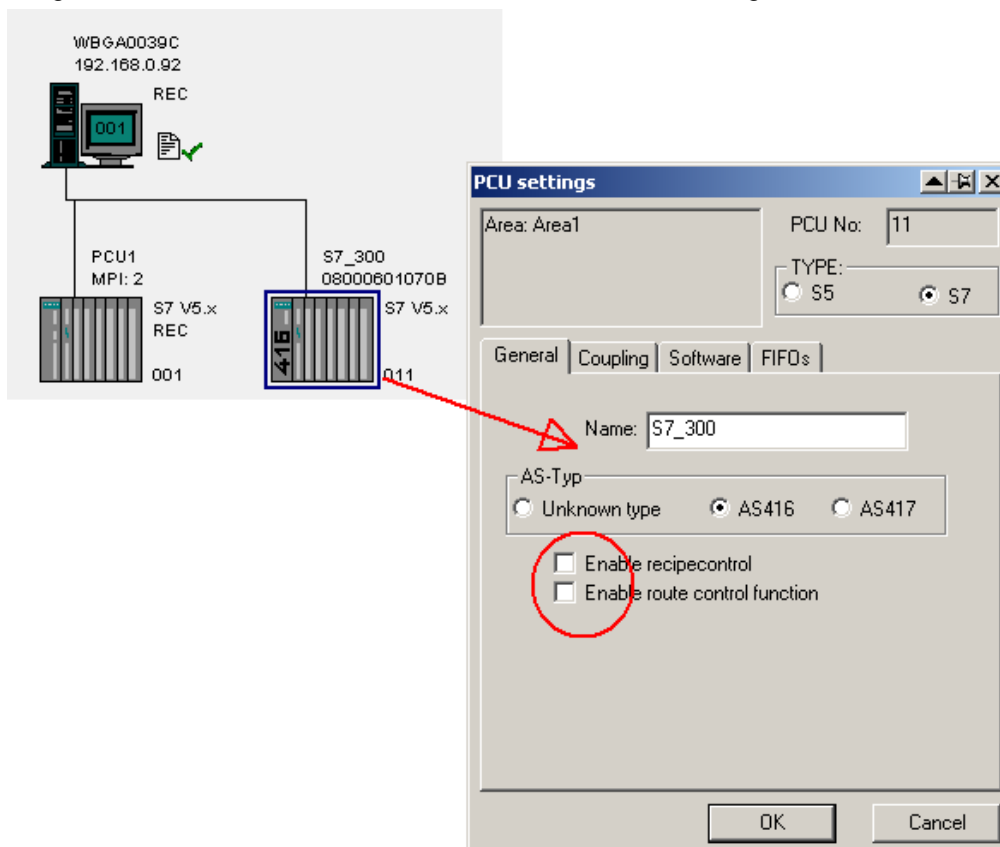

Then open the file \windcs\sys\area.ini and write "Sistar=0 "to the PCU S7\_300 [S7\_300]

Name=S7\_300

EnableRecipeControl=0

Family=S7

IP\_Addr=192.168.0.2

l2\_addr=2

Sistar=0

SW\_Recipe=V5

Communication can be by Ethernet or MPI!

Good luck!

Contact: Stefan Schraner

[StefanSchraner@yahoo.de](mailto:StefanSchraner@yahoo.de)